

# Deep Cycle VRLA AGM Battery

# HTL12-14

CSPOWER HTD series deep cycle long life vrla amg battery uses a different chemistry additives in the positive plates and special AGM separators, The HTD series features 70% higher cyclic life with 12-15 years of float life when compared to the standard Duration range. This series is highly suited for very unreliable power applications requiring the batteries to provide extra cyclic life performance such as PV system applications, small RE systems and electric vehicles.

<b>12V</b> Voltage	<b>14Ah</b> Capacity	<b>AGM</b> Technology	<b>Deep</b> Cycle
-----------------------	-------------------------	--------------------------	----------------------

**CSPOWER**  
HIGH TEMPERATURE  
LONG LIFE **14Ah**



**12V** **HTL12-14**



### GENERAL FEATURES


- Thicker plate with high Tin low Calcium alloy
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density
- Longer Service Life, in both Float or Cyclic

### APPLICATIONS

- Solar Systems
- Wheel chair, Golf Cart
- Telecom systems
- Cable TV Systems
- Emergency Power System

### DIMENSIONS & WEIGHT

Length(mm)	152 ± 1
Width(mm)	99 ± 1
Height(mm)	96 ± 1
Total Height(mm)	102 ± 1
Weight(kg)	3.8 ± 3%

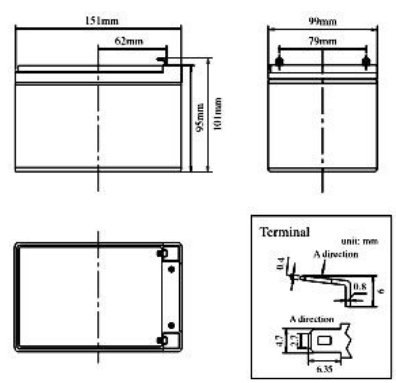

### TECHNICAL SPECIFICATIONS

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		12 Years
Nominal Capacity @25°C (20 hour rate@0.7A,10.8V)		14Ah
Capacity @25°C	10hour rate (1.26A,10.8V)	12.6Ah
	5 hour rate (2.3A,10.5V)	11.5Ah
	1 hour rate (8.5A,9.6V)	8.5Ah
Internal Resistance	Full Charged Battery@25°C	≤15.0mΩ
Ambient Temperature	Discharge	-15°C~45°C
	Charge	-15°C~45°C
	Storage	-15°C~45°C
Max.Discharge Current@25°C		84A(5s)
Capacity affected by Temperature (10 hour )	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 3.6A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 3.6A Voltage 14.4-14.9V

### BATTERY DISCHARGE TABEL

**Discharge Constant Current per Cell (Amperes at 25°C)**

F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	30.8	23.2	15.4	10.8	8.5	5.2	4.0	2.5	1.8	1.39	0.77
1.65V	30.2	22.8	15.1	10.6	8.3	5.1	3.9	2.4	1.7	1.36	0.76
1.70V	29.7	22.3	14.8	10.4	8.2	5.0	3.8	2.4	1.7	1.34	0.74
1.75V	29.1	21.9	14.6	10.2	8.0	5.0	3.7	2.3	1.7	1.31	0.73
1.80V	28.0	21.1	14.0	9.8	7.7	4.8	3.6	2.2	1.6	1.26	0.70

**Discharge Constant Power per Cell (Watts at 25°C)**







F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	59.3	44.6	29.6	20.8	16.3	10.1	7.6	4.8	3.4	2.7	1.5
1.65V	58.2	43.8	29.1	20.4	16.0	9.9	7.5	4.7	3.4	2.6	1.5
1.70V	57.1	43.0	28.6	20.0	15.7	9.7	7.3	4.6	3.3	2.6	1.4
1.75V	56.1	42.2	28.0	19.6	15.4	9.5	7.2	4.5	3.2	2.5	1.4
1.80V	53.9	40.6	27.0	18.9	14.8	9.2	6.9	4.4	3.1	2.4	1.3

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSPOWER** for the latest information.

**Deep Cycle VRLA AGM Battery**

**HTL 12-14**

**PERFORMANCE CHARACTERISTICS**

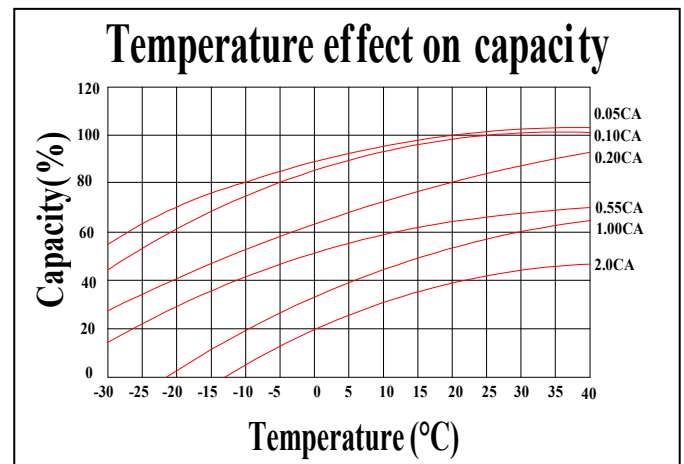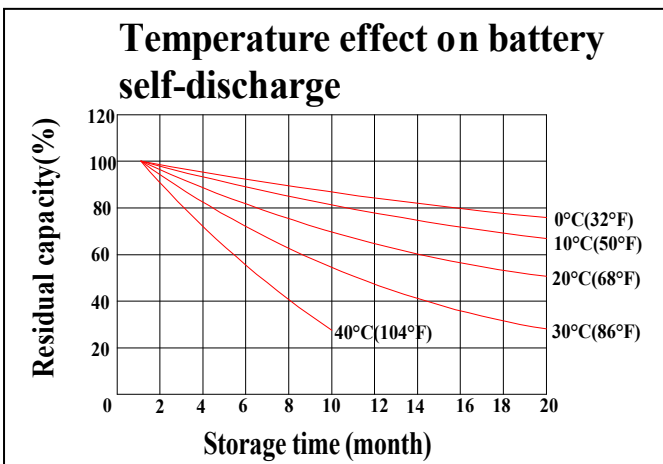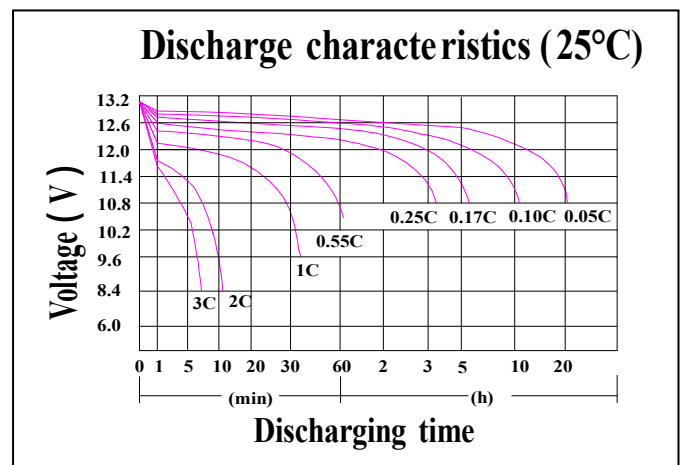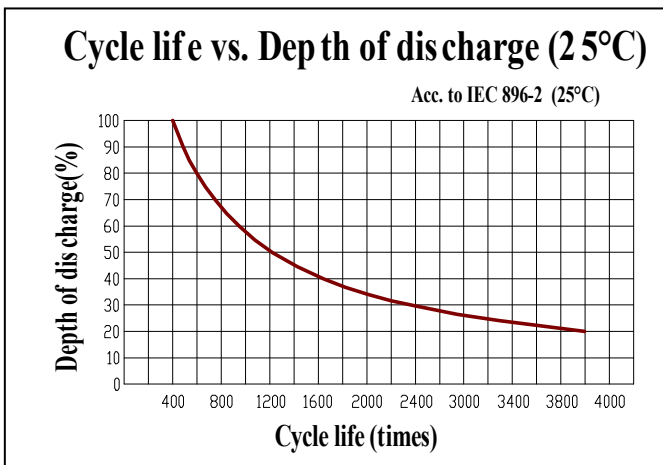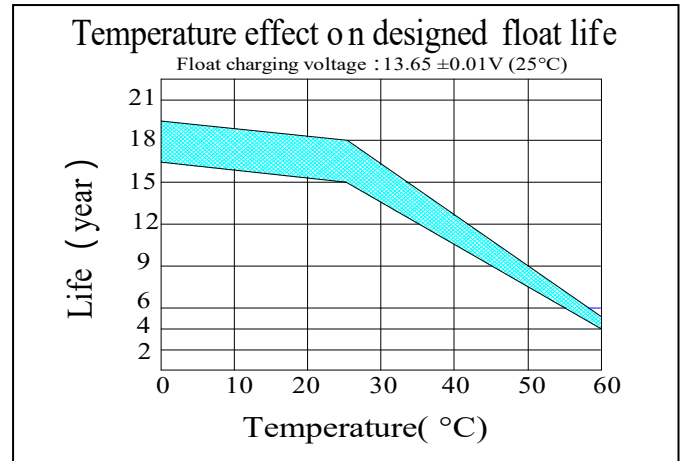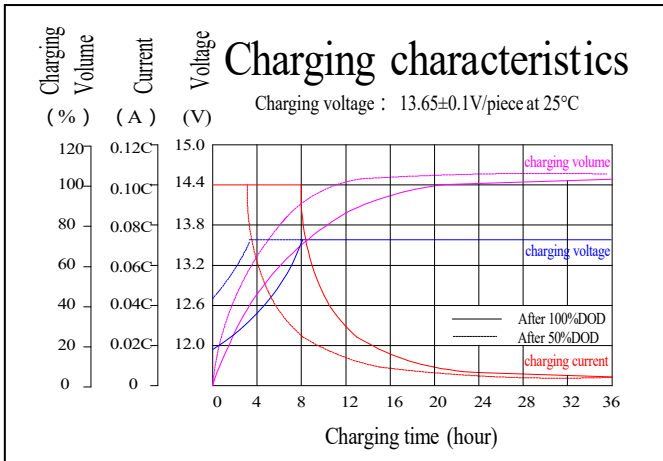

**BATTERY CONSTRUCTION**

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistance ABS UL94-V0	Flame Si-Rubber and aging resister	F1/F2	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal

**Shenzhen CSPower Battery Technology Co.,Ltd.**

Add: Building B, Huafeng Technology Park, Baoan, Shenzhen, China.

Tel: +86-755-29123661 Email: sales@csagmbattery.com



[HTTP://WWW.CSAGMBATTERY.COM](http://www.csagmbattery.com)