


Single Pole Distribution Blocks单极分线盒

UKK250

250A-IEC

255A- 

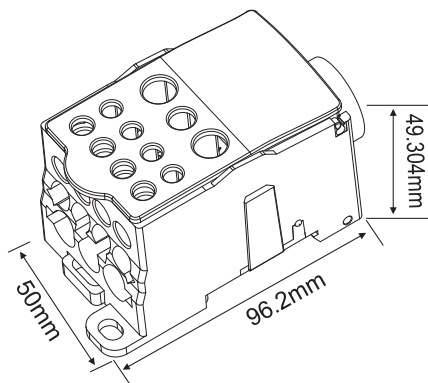

认证/Certification



尺寸及材质 / Material

长宽高 / Size (mm)	96.2x50x49.304
螺钉材质 / Screw	铁、镀锌 / Zinc-Coated Steel
导体件 / Conductor	铜、镀锡 / Tin-Coated Brass
塑料外壳 / Housing	PA66/V-0
透明盖板 / Cover	PC

电气性能 / Electrical Data

参考标准 / Standards	IEC 60947-7-1	UL1059
额定电压 / Voltage (V)	1000	600
额定电流 / Current (A)	250	255
Icw (KA)	24.5	
IPk (KA)	51	

接线参数 / Wiring Data

输入 / Input	A	B	C
接口数量 / Connection Points	x1		
紧固力矩 / Torque(N · m)	19		
接口直径 / Diameter(mm)	15		
公制线径 / Metric Wire(mm ²)	35~120		
美制线径 / Imperial Wire((AWG)	6~250kcmil		
输出 / Output	A	B	C
接口数量 / Connection Points	x2	x5	x4
紧固力矩 / Torque(N · m)	4.4	2.7	2.7
接口直径 / Diameter(mm)	9	6.8	6.1
公制线径 / Metric Wire(mm ²)	6~35	2.5~16	2.5~10
美制线径 / Imperial Wire((AWG)	10~1	14~4	14~6