

# Plastic waterproof cable gland SC-PG type

## 塑料固定电缆防水接头 SC-PG 型


赛出品质，创新未来



### 塑料固定电缆防水接头 SC-PG 型

Plastic waterproof cable gland SC-PG type

德制螺纹  
DE screwing

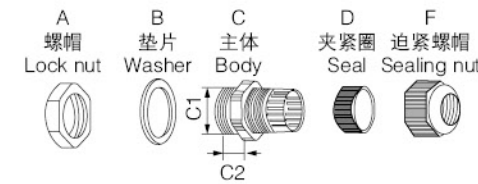

- 产品材质：UL 认可的尼龙 PA66，丁腈橡胶。
- 螺纹规格：公制 (Metric)，德制 (PG)，英制 (G)，美制 (NPT)。
- 工作温度：静态 -40℃至 100℃，瞬时耐热至 120℃，动态 -20℃至 80℃，瞬时耐热至 100℃。
- 产品特性：特殊的夹紧爪与橡胶件设计，夹紧范围大，抗拉力特强，可防水，防尘，防盐，耐酸碱，酒精，油脂及一般溶剂。
- 颜色种类：黑色，灰色，特殊颜色（白色、红色、蓝色、深灰色）可定做。
- Material：UL approved nylon PA66，Nitrilebutadienerubber(NBR)。
- Thread specification：Metric，PG，G，NPT。
- Working temperature：-40℃ to 100℃ in static state，instantaneous heat resistance up to 120℃，-20℃ to 80℃ in dynamic state，instantaneous heat resistance up to 100℃。
- Characteristics：Special design of clamping die and rubber part，large range in clamping cable，ultra-strong stretching resistance，waterproof，dustproof，and high ability to resist salt，acid，alkali，alcohol，grease and general solvent。
- Color：Black，grey as special colors(white，red，blue，darkgrey) that can be designed at request。

产品型号 Model	螺纹尺寸 Thread size (mm)	开孔尺寸 size of hole (mm)	螺纹长度 Length of thread (mm)	壁厚 Wall thickness (mm)	适用电缆 Applicable to cable (mm)	扳手尺寸 Wrench size (mm)	包装数量 PCS
SC-PG7	12.5	Φ12.6-13	9	3	3-6.5	18/16	100
SC-PG7	12.5	Φ12.6-13	9	3	2-5	18/16	100
SC-PG9	15.2	Φ15.3-15.5	9	3	4-8	22/19	100
SC-PG9	15.2	Φ15.3-15.5	9	3	2-6	22/19	100
SC-PG11	18.6	Φ18.7-19	9	3	5-10	24/22	100
SC-PG11	18.6	Φ18.7-19	9	3	3-7	24/22	100
SC-PG13.5	20.4	Φ20.5-21	9	4	6-12	27/24	100
SC-PG13.5	20.4	Φ20.5-21	9	4	5-9	27/24	100
SC-PG16	22.5	Φ22.6-23	10	5	10-14	30/27	100
SC-PG16	22.5	Φ22.6-23	10	5	6-12	30/27	100
SC-PG19	24	Φ24.2-24.5	10	5	12-15	30/28	100
SC-PG19	24	Φ24.2-24.5	10	5	8-12	30/28	100
SC-PG21	28.3	Φ28.5-29	12	5	13-18	36/33	100
SC-PG21	28.3	Φ28.5-29	12	5	9-16	36/33	100
SC-PG25	30	Φ30.2-30.5	12	6	15-22	37/35	100
SC-PG25	30	Φ30.2-30.5	12	6	16-20	37/35	50
SC-PG29	37	Φ37.2-37.5	12	6	18-25	45/42	50
SC-PG29	37	Φ37.2-37.5	12	6	13-20	45/42	50
SC-PG36	47	Φ47.3-48	17	7	22-32	58/52	20
SC-PG36	47	Φ47.3-48	17	7	20-26	58/52	20
SC-PG42	54	Φ54.5-55	19	7	32-38	65/60	20
SC-PG42	54	Φ54.5-55	19	7	25-31	65/60	20
SC-PG48	59.3	Φ60-61	19	7	37-44	70/69	10
SC-PG48	59.3	Φ60-61	19	7	25-36	70/69	10
SC-PG63	71	Φ71.5-72	27	19	42-52	83/75	5
SC-PG63	71	Φ71.5-72	27	19	32-40	83/75	5