


Application range

JBK5 series machine tool control transformer is developed by absorbing the foreign similar products on the basis of domestic JBK3 series machine tool control transformer after many years' research, it optimizes the foreign advanced terminal structure, combines the terminal and the frame together, enhance the protection level, and prevent accidental touch of the circuit, it also adopts domestic IT cold-press terminal, and the wiring method can make the connection intensity increased.





Model and meaning



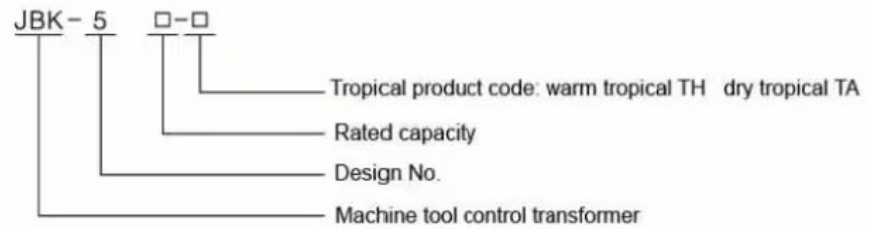


Outline and installation size

JBK5-40~800



JBK5-1000~2500



Model	Mounting hole distance		Outline size				Mounting hole
	A	C	B max	D max	E max	F max	
JBK5-40	56±0.5	46±0.5	78	74	94	1.2	4.6
JBK5-63	56±0.5	46±0.5	78	74	94	1.2	4.6
JBK5-100	64±0.5	62±0.5	85	77	97	1.5	5.5
JBK5-160	84±0.5	73.5±0.5	96	94	109	1.5	5.8
JBK5-250	84±0.5	85±0.5	96	102	109	1.5	5.8
JBK5-400	90±0.5	85±0.5	120	102	129	2	5.8
JBK5-500	90±0.5	97±0.5	120	113	129	2	5.8
JBK5-630	122±0.5	90±0.5	150	112	154	2	7
JBK5-800	122±0.5	105±0.5	150	132	154	2	7
JBK5-1000	127.5±0.2	152±0.2	155	207	152	3	7
JBK5-1600	140±0.2	176±0.2	180	232	152	3	7
JBK5-2500	173±0.2	200±0.23	205	262	169	4	7
JBK5-3000	173±0.2	200±0.23	205	262	188		7
JBK5-4000	173±0.2	200±0.23	205	262	188		7
JBK5-5000	173±0.2	200±0.23	205	262	215		7
JBK5-1000	140±0.2	105±0.23	170	130	160	Vertical	7
JBK5-1600	140±0.2	115±0.23	170	140	160	Vertical	7