


Single Pole Distribution Blocks单极分线盒

UKK80

80A-IEC

85A-

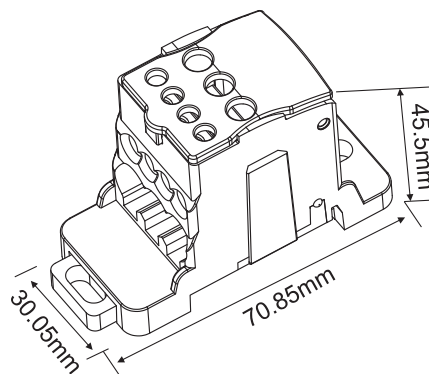

认证/Certification



尺寸及材质 / Material

长宽高 / Size (mm)	70.85x30.05x45.5
螺钉材质 / Screw	铁、镀锌 / Zinc-Coated Steel
导体件 / Conductor	铜、镀锡 / Tin-Coated Brass
塑料外壳 / Housing	PA66/V-0
透明盖板 / Cover	PC

电气性能 / Electrical Data

参考标准 / Standards	IEC 60947-7-1	UL1059
额定电压 / Voltage (V)	1000	600
额定电流 / Current (A)	80	85
Icw (KA)	3	
IPk (KA)	22	

接线参数 / Wiring Data

输入 / Input	A	B	C
接口数量 / Connection Points	x1		
紧固力矩 / Torque(N · m)	3.5		
接口直径 / Diameter(mm)	6.8		
公制线径 / Metric Wire(mm ²)	6~16		
美制线径 / Imperial Wire((AWG)	16~4		
输出 / Output	A	B	C
接口数量 / Connection Points	x4	x2	
紧固力矩 / Torque(N · m)	1.2	3.5	
接口直径 / Diameter(mm)	4.5	6.8	
公制线径 / Metric Wire(mm ²)	2.5~6	2.5~16	
美制线径 / Imperial Wire((AWG)	16~8	16~4	